## ..crack.. treatment and ..ring.. prevention

## Method of check

The line does a strange way to cut. It cuts very frequently. For this case, [kizu] enters the guide ring by some impacts. It might cause it, and check it by the following method, please.

The blade of the cutter is hit in the ring, and they are made to round with [guru]. RingThe blade is caught with [kachi] if there are a lack and a crack.

. This time, even if the blade of the time cutter is applied, the ring cannot be planed.



Or, [guru] and the mystery see the inside of the ring in the line that picks up the slack. The line is caught if there are a lack and a crack of the ring.

> . There is a method of passing women's stockings long and slenderly cut through the ring and the examination, too.



for the ring crack, the ring omission, and the frame damage to happen. With the rod belt to encase the rod in the carlt firmly bundles, and we will recommend putting on steady space without impossibility or setting it in the rod

holder only for the car after the exclusive use and top a cover is installed.

The guide rings of FUJI are all made of ceramics fine. [Fu]It excels extremely in durability, and [a;inseramikku] might crack if it strikes close to home by falling and throwing though it is the best material as the guide ring. Please note handling including

Because our company doesn't exchange rings alone and sell it, it is necessary to exchange guides for the ring crack as well as the time of the frame damage.

Therefore, please inquire even the pole manufacturer and the retail store externals of purchase when the trouble of the ring crack, the ring omission, and the frame damage occurs.



Please refer to this treatment if you discover the ring crack in the middle of fishing. Please understand this however is a stop-gap measure to the end, and exchange guides after this.


Please consult the pole manufacturer and the retail store externals of purchase about the exchange of guides.



[Kizu] is buried repeating drying when the instant adhesive is opened, and piled up in the part of the crack after it is confirmed that there is neither dirt nor getting wet in the ring.


Drying etc. are repeated when drying. and piling it up when piling it up on [kizu].

## Emergency correction of frame bending

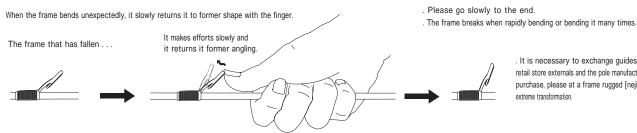

. It is necessary to exchange guides, and inquire of the retail store externals and the pole manufacturer of purchase, please at a frame rugged [nejire]ing worth and an

## The ring crack and the frame transformation are prevented.

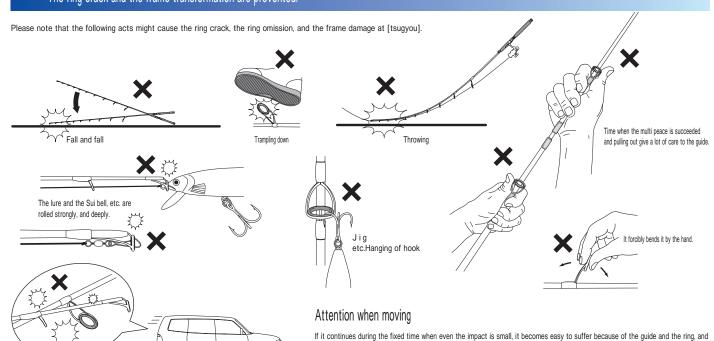

. Please note the opening and shutting of the door and the power window enough.